




Improve
Tomorrow

XDi 144/192 Navi

Standard wind indicators

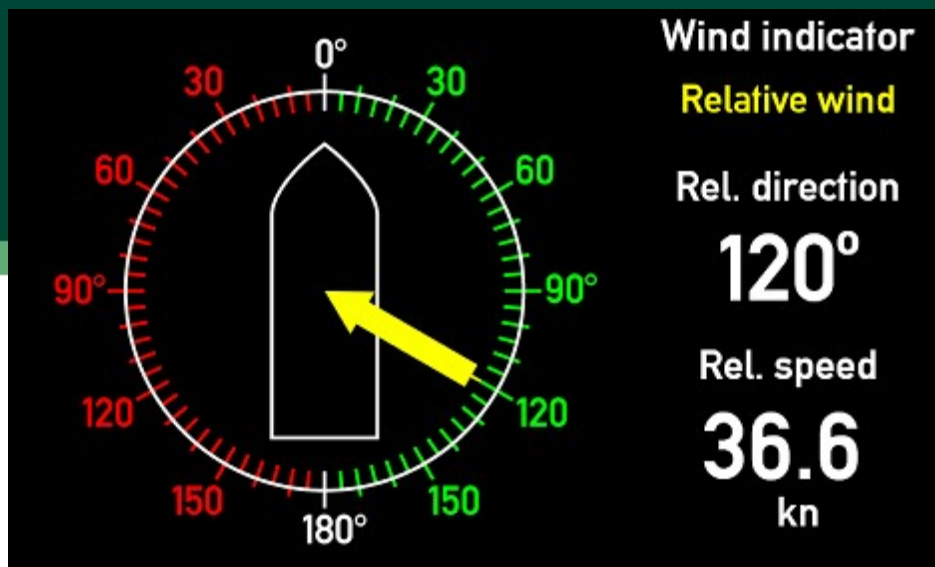

Library owner: DEIF STANDARD WIND

Library number: 1

Library version: 2010

Table of Contents

1	LIBRARY INFORMATION	3
2	PRODUCT PROFILES (PP)	4
3	VIRTUAL INDICATORS (VI)	8
4	DETAILED VIRTUAL INDICATOR (VI) DESCRIPTION	9

Library description :

This library contains a selection of standard wind indicators for relative, true and geographic true wind.
 Relevant indicators are available for both forward bridge and aft bridge applications.
 True and geographic true wind speed and direction can be calculated by the XDi, just select a VS profile with a wind calculator.
 VS input profiles for NMEA data (IEC 61162-1) or XDi-net data is available for each virtual indicator.

AUTOMATED NMEA SETUP

When finalizing the XDi setup wizard, use the NMEA auto scan function to detect available sources and make a fast automated setup of the IEC61162-1 NMEA interface.
 Make sure that all devices sourcing NMEA data to XDi are connected and active.
 In case of multiple data sources, a manual source selection from the list of available input source will be needed.

WIND SENSOR OFFSET AND FILTERS

The wind direction can be offset from the installation menu. Enter the NMEA manual setup menu. In the NMEA config list open Wind direction R1 and insert the offset value in degrees x10 (4.0 deg = 40).
 In the same menu it is also possible to change the average filtering of wind speed and direction received as NMEA data.

Library status symbols :



Released & Locked



Approved



Pending



Draft



Not approved

Timestamp 29-07-2026 08.48.40

Library Specification

Library owner no. : 000002
Library owner name : DEIF STANDARD WIND
Product type : XDi 144/192
Performance class : Navi
Library number : 1
Library name : Standard wind indicators
Library orientation : Landscape
Library status : Released & Locked
Library version : 2010

Last changed : 29-07-2026 08.48.26

Library default settings :

180 display rotation : False
CAN NodeID : 30

Library notes :

29-07-2026 / JHU, ver 2010: Following has been added:

- 2 new PP (6 & 7) for automatic setup of NMEA in simple systems (multi & single source)
- H1 alarm colour in VI 11 have been changed from yellow to orange to improve clarity (contact DEIF if you need the old VI)
- VI 12 (relative only) added with 1 alarm
- VI 13 added (RTG) added with 2 alarms

20-12-2023 / ATH, ver 2009: This update adds wind data fallback functionality on VI001-VI009. It is added as last VS on each VI.

PPs are also updated to take wind speed 2 and wind direction 2 on NMEA.

VI10 and VI11 have not been working. They are fixed in this update.

07-04-2020 / JOL, ver.2008: This update support the new display colour adjust function located in the USER NEMU. This function makes it possible to adjust XDi displays to look the same.

04-03-2020 / MLA, ver.2007: Added VI010-11 with alarm output on relative and true wind speed

11-07-2018/MLA, ver.2006: VI-9 added.

Product profiles (PP)



Default settings of product and system related parameters, as dimmer and CANbus settings are stored in a product profile.

Timestamp 29-07-2026 08.48.40

PP No.	PP Name	Description	Status	Notes
1	PP01 Front dimmer	Dimmer from front Dimmer from front buttons Default: Dimmer group 1. Auto day/night at 70% Send and receive dimmer on XDi-net Supported NMEA sentences: Dimmer(Gr.1-6): DDC (no colour shift) Wind: MWV, MWD, Speed: VHW, VBW, VTG, RMC, Heading: HMR, THS, HTD, VHW, HDT, HDG, MagVar; HMR, RMC, HDG Shares selected NMEA data on XDi-net		In an XDi-net system any XDi in a group can control the groups dimmer level when it uses this product profile.
2	PP02 XDi-net	Dimmer via XDi-net Dimmer from XDi-net Default: Dimmer group 1. Auto day/night at 70% Supported NMEA sentences: No NMEA dimmer support Wind: MWV, MWD, Speed: VHW, VBW, VTG, RMC, Heading: HMR, THS, HTD, VHW, HDT, HDG, MagVar; HMR, RMC, HDG Shares selected NMEA data on XDi-net		This profile is used in a XDi-net system where the dimmer of this XDi is controlled by an XDi with AX1 analogue dimmer control shared on XDi-net. Or in other situations where you want dimmer to be controlled via XDi-net.
3	PP03 Front dimmer	Local Dimmer Dimmer from front buttons Default: Dimmer group: Local Auto day/night at 70% Supported NMEA sentences: Dimmer(Local): DDC (no colour shift) Wind: MWV, MWD, Speed: VHW, VBW, VTG, RMC, Heading: HMR, THS, HTD, VHW, HDT, HDG, MagVar; HMR, RMC, HDG Shares selected NMEA data on XDi-net		This profile is used where only the XDi itself is controlled by the front buttons. You can control this unit via an NMEA input. The dimmer setting is not shared on XDi-net.

PP No.	PP Name	Description	Status	Notes
4	PP04 Analogue	Analogue dimmer Required: AX1 in Slot 1 Default: Dimmer gr. 1 - Auto Day/Night Dimmer potmeter (+ term 3, - term 1, wiper term 2) Dimmer shared on XDi-net Can be reconfigured to voltage input Supported NMEA sentences: No NMEA dimmer support Wind: MWV, MWD, Speed: VHW, VBW, VTG, RMC, Heading: HMR, THS, HTD, VHW, HDT, HDG, MagVar; HMR, RMC, HDG Shares selected NMEA data on XDi-net		Analogue input for groupe dimmer control and automatic DAY/Night shift. This profile controls dimmer gr.1 in a XDi-net system. Only one XDi with AX1 dimmer for each dimmer groupe.
5	PP05 NMEA	NMEA/XDi-net dimmer Separate Dimmer and Day/Night shift via NMEA and/or XDi-net Default: Dimmer group 1. Supported NMEA sentences: Dimmer and Day/Night shift (Gr.1-6): DDC Wind: MWV, MWD, Speed: VHW, VBW, VTG, RMC, Heading: HMR, THS, HTD, VHW, HDT, HDG, MagVar; HMR, RMC, HDG Shares selected NMEA data on XDi-net		NMEA DDC can control dimmer and colour in group 1 to 6 and share it on XDi-net. If the XDi is not controlled by its NMEA input it will receive dimmer value and colour via XDi-net. Use this profile to make XDi-net system with NMEA dimmer and Day/Night control.

PP No.	PP Name	Description	Status	Notes
6	PP06 Front dimmer	Auto NMEA config., multiple sources Plug & Play if the defined NMEA spec are met, no scanning is needed. Dimmer from front buttons Default: Dimmer group 1. Auto day/night at 70% Send and receive dimmer on XDi-net NMEA connection: NX2 in Slot 2 Supported NMEA sentences: Wind:MWV, Talk.ID: WI port 2 (termin.10&11) Speed: VBW, Talk.ID: IN port 3 (termin. 1&2) Heading: HDT, Talk.ID: IN port 3 (termin. 1&2) Shares selected NMEA data on XDi-net		Dimmer: In an XDi-net system any XDi in a group can control the groups dimmer level when it uses this product profile. This product profile can be used for for simple wind measurement system, where the NMEA sources are connected as specified. Speed input is only needed if True or Geographical indications are used. Heading input is only needed if Geographical indications are used. Use this profile if the wind sensor is connected directly to the XDi. all other NMEA data is coming from the same source (optional, if no true or geographical data is presented, only the wind sensor data is needed.. If the requirements are met, select "Finish wizard" instead of "NMEA setup" after selecting the VS. It is not necessary to make NMEA configuration. The system will be "Plug & Play": just connect the sensor to the XDi after executing the installation wizard. Note: It is always possible to run the NMEA setup if needed.

PP No.	PP Name	Description	Status	Notes
7	PP07 Front dimmer	Auto NMEA config., single source Plug & Play if the defined NMEA spec are met, no scanning is needed. Dimmer from front buttons Default: Dimmer group 1. Auto day/night at 70% Send and receive dimmer on XDi-net NMEA connection: NX2 in Slot 2, connect to port 1 (terminals 1 & 2) Supported NMEA sentences: Wind: MWV, Talk.ID: WI Speed: VBW, Talk.ID: IN Heading: HDT, Talk.ID: IN Shares selected NMEA data on XDi-net		Dimmer: In an XDi-net system any XDi in a group can control the groups dimmer level when it uses this product profile. This product profile can be used for for simple wind measurement system, where the NMEA sources are connected as specified. Speed input is only needed if True or Geographical indications are used. Heading input is only needed if Geographical indications are used. Use this profile if the wind sensor is connected directly to the XDi. all other NMEA data is coming from the same source (optional, if no true or geographical data is presented, only the wind sensor data is needed.. If the requirements are met, select "Finish wizard" instead of "NMEA setup" after selecting the VS. It is not necessary to make NMEA configuration. The system will be "Plug & Play": just connect the sensor to the XDi after executing the installation wizard. Note: It is always possible to run the NMEA setup if needed.

Virtual Indicators (VI)



The VI contains the graphical layout of and indicator and defines all data types that are presented on the indicator.

Each VI has at least one VI-setup profile (VS) that defines the input types and default parameter settings.

Timestamp 29-07-2026 08.48.40


VI No.	Name	VI-setup profiles (VS)	Approvals	Status
001	Wind FWD R	3	 	
002	Wind Aft R	3	 	
003	Wind R,T	4	 	
004	Wind Aft R,T	4	 	
005	Wind R,T,GT	4	 	
006	Wind Aft R,T,GT	4	 	
007	Wind R,T,GT	4	 	
008	Wind Aft R,T,GT	4	 	
009	Wind Geo Land	3	 	
010	Wind FWD R	2	 	
011	Wind FWD R,T	3	 	
012	Wind R-1xAl	2	 	
013	Wind R,T,GT-2xAl	3	 	

 Approvals only apply for XDi 192.

Timestamp 29-07-2026 08.48.40

VI 001 Wind FWD R

Screen 1 S1 Rel. wind

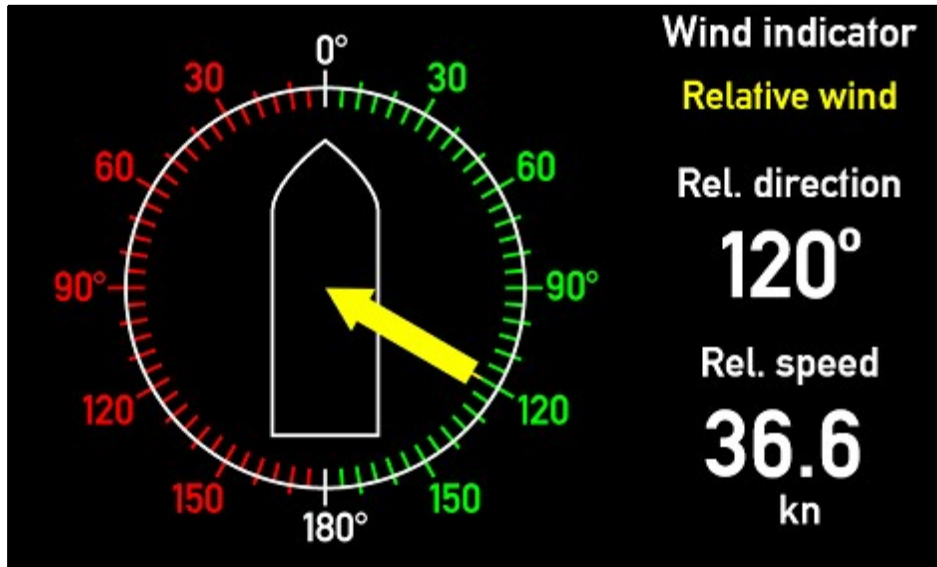
**Description :** Wind indicator FWD, Relative

Presents relative wind speed and direction
Replacement for WSDI-2 standard
Wind direction and wind speed (max 150 m/s)
One selectable headline and selectable speed unit

Status :**VI Notes :**

VI-setup profiles (VS) for VI001

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind Output are selected and activated from menu !		
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA FB	NMEA0183 w Fallback As VS 02 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.

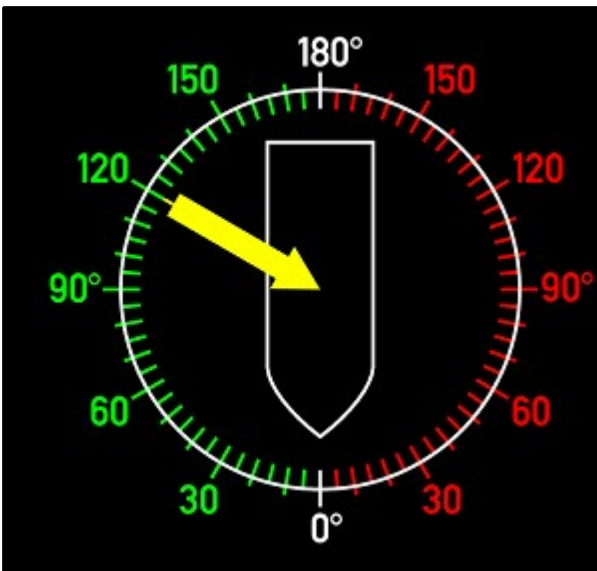VI 002	Wind Aft R
Screen 1	S1 Rel. wind  Wind indicator Relative wind Rel. direction 120° Rel. speed 36.6 kn
Description : Wind indicator AFT, Relative Presents relative wind speed and direction Replacement for WSDI-2 standard Wind direction and wind speed (max 150 m/s) One selectable headline and selectable speed unit Status :  VI Notes :	


<u>VI-setup profiles (VS) for VI002</u>				
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind Output are selected and activated from menu !		

VI-setup profiles (VS) for VI002

VS No.	Name	Description	Status	Notes
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA FB	NMEA0183 w Fallback As VS 02 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.


Screen 1


S1 Rel. wind

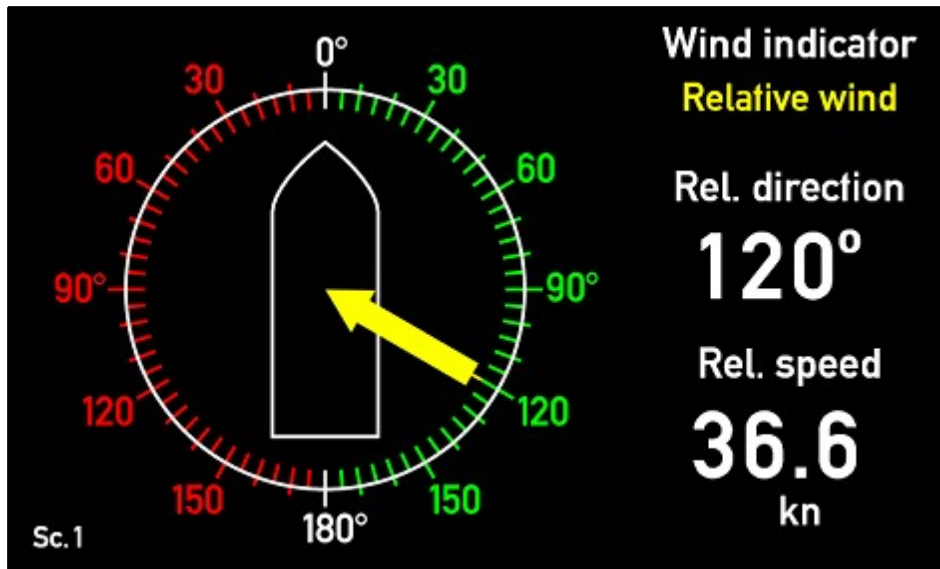

Screen 2

S2 True wind

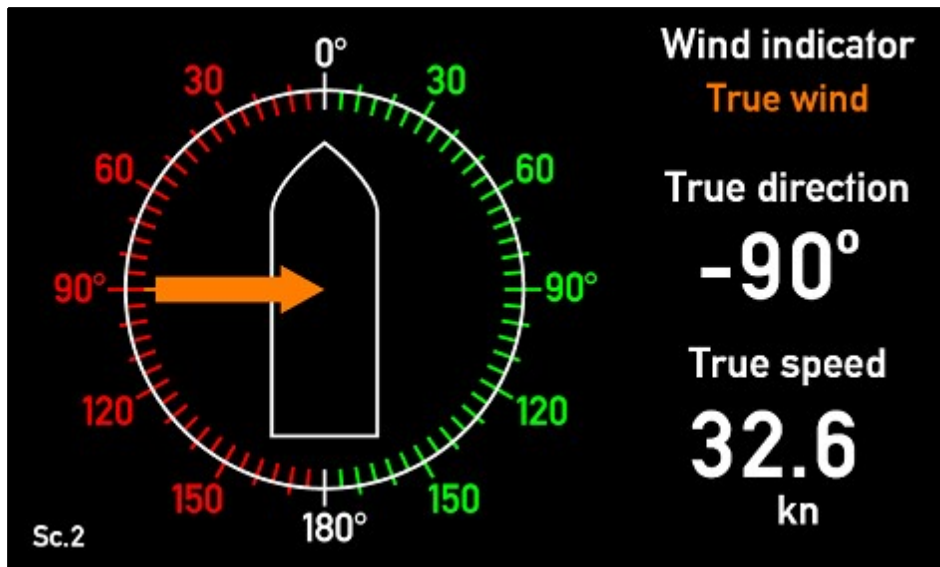

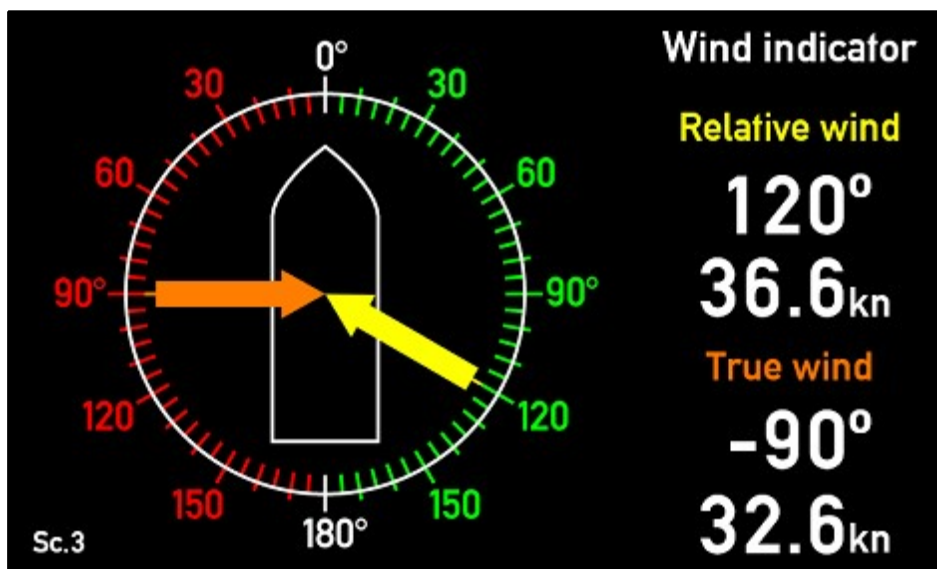**Description :** Wind indic. FWD, 3 screen

Relative and True true wind rel. to ship
 Replacement for WSDI-2 with NCI-1 box
 Wind direction and wind speed (max 150 m/s)
 One selectable headline for all screens
 Selectable speed unit

Status :

VI Notes : This virtual indicator has 3 screens to toggle between using the left push-button on front.
 Unit can be shifted using the quick menu using the right push-button,
 select another unit profile or edit the profile to match your needs.

VI-setup profiles (VS) for VI003


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind and True wind rel. ship Output are selected and activated from menu !		

VI-setup profiles (VS) for VI003

VS No.	Name	Description	Status	Notes
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True wind relative to ship at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind and True wind (repeated) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA0183 - Calculate NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed at input S2.1 or S2.3 is used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind rel. ship Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
4	VS04 NMEA FB	NMEA0183 - Calculate w Fallback As VS 03 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.


Screen 1


S1 Rel. wind

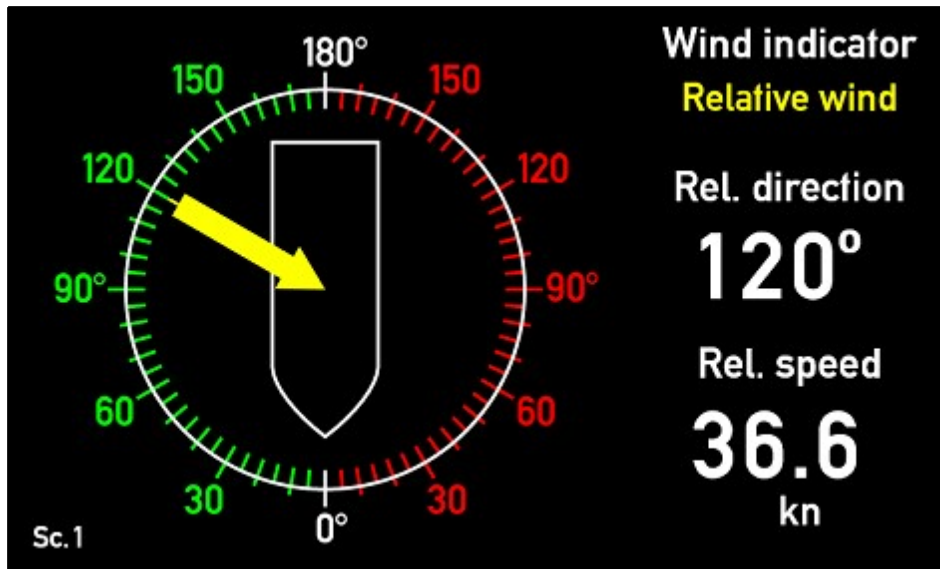

Screen 2

S2 True wind

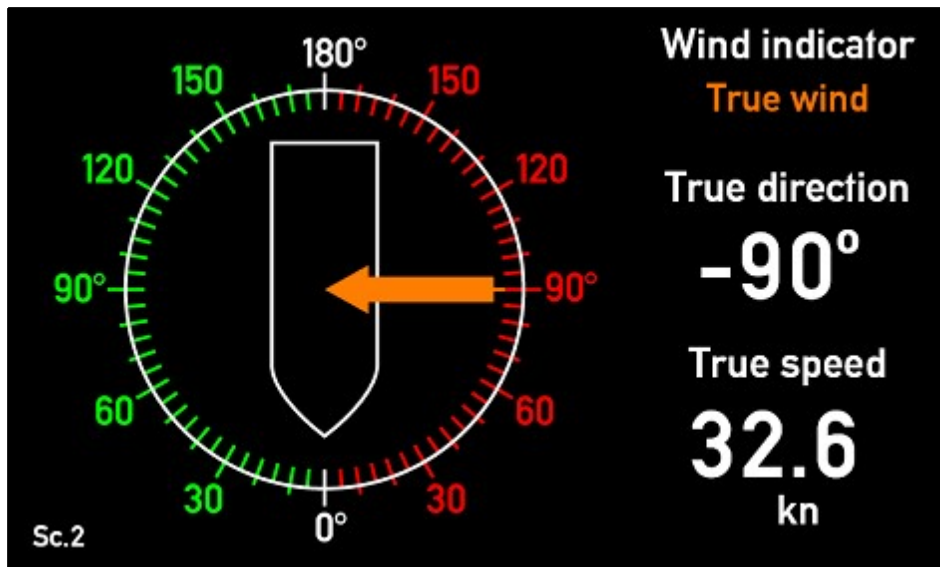

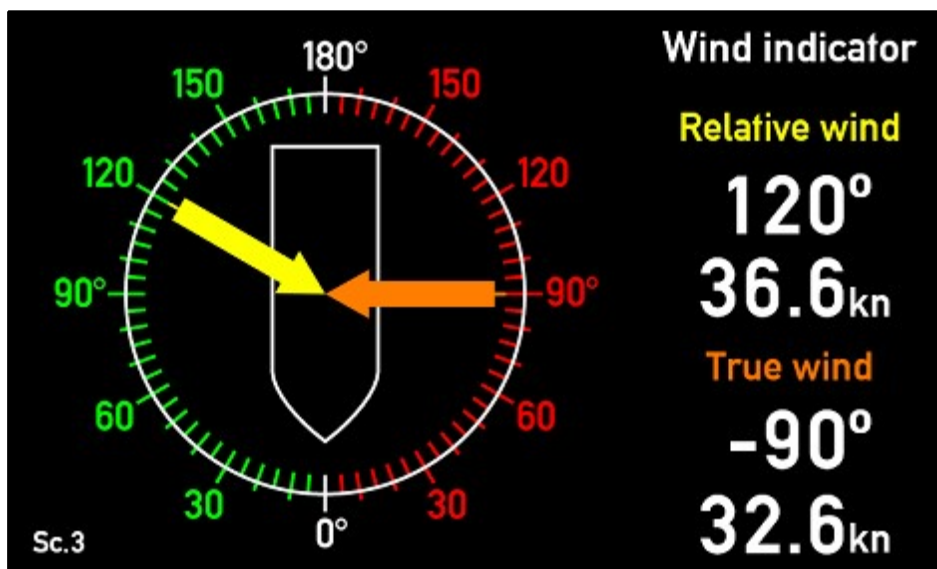**Description :** Wind indic. AFT, 3 screen

Relative and True true wind rel. to ship
 Replacement for WSDI-2 with NCI-1 box
 Wind direction and wind speed (max 150 m/s)
 One selectable headline for all screens
 Selectable speed unit

Status :**VI Notes :**

This virtual indicator has 3 screens to toggle between using the left push-button on front.
 Unit can be shifted using the quick menu using the right push-button,
 select another unit profile or edit the profile to match your needs.

VI-setup profiles (VS) for VI004


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind and True wind rel. ship Output are selected and activated from menu !		

VI-setup profiles (VS) for VI004

VS No.	Name	Description	Status	Notes
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True wind relative to ship at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind and True wind (repeated) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA0183 - Calculate NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed at input S2.1 or S2.3 is used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind rel. ship Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
4	VS04 NMEA FB	NMEA0183 - Calculate w Fallback As VS 03 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.


Screen 1

S1 Rel. wind

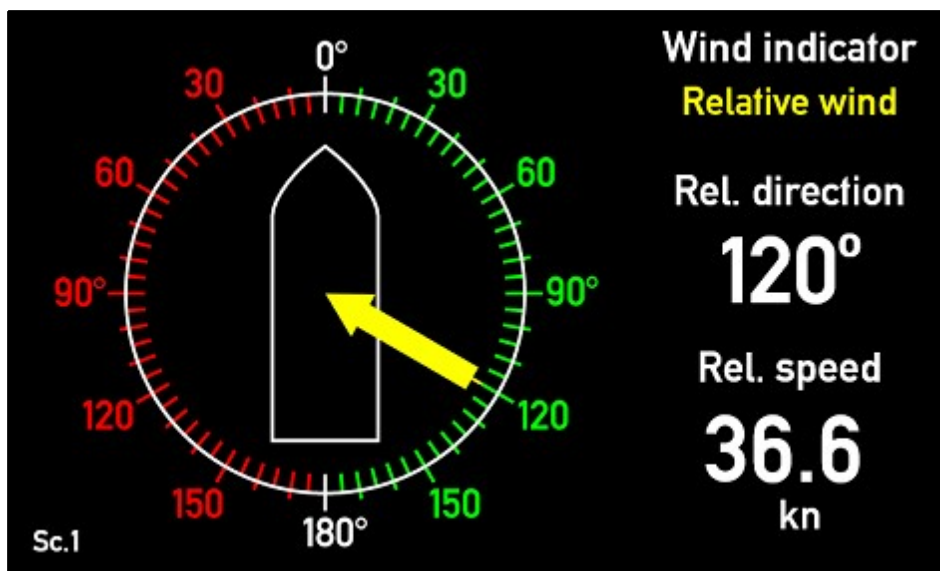


Screen 2

S2 True wind

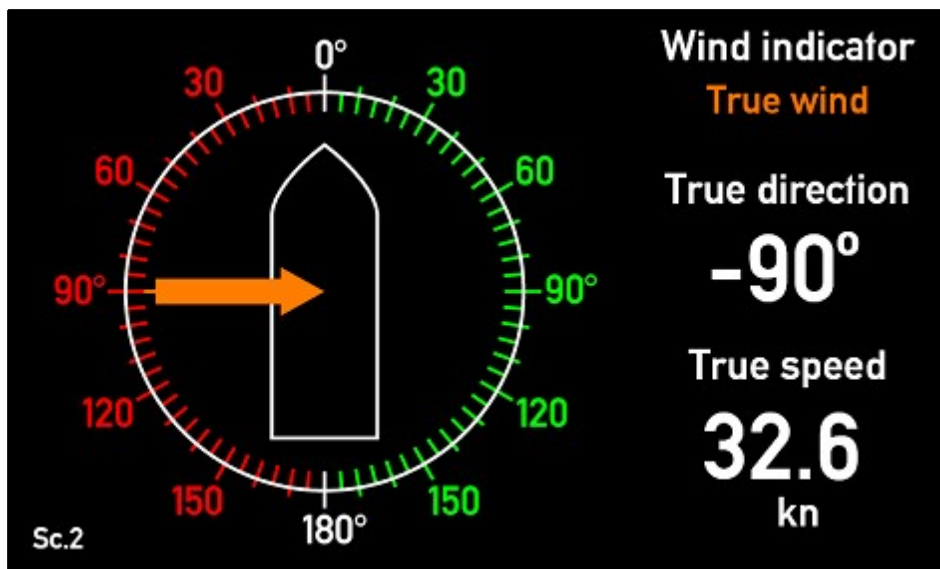


Screen 3

S3 Geo wind

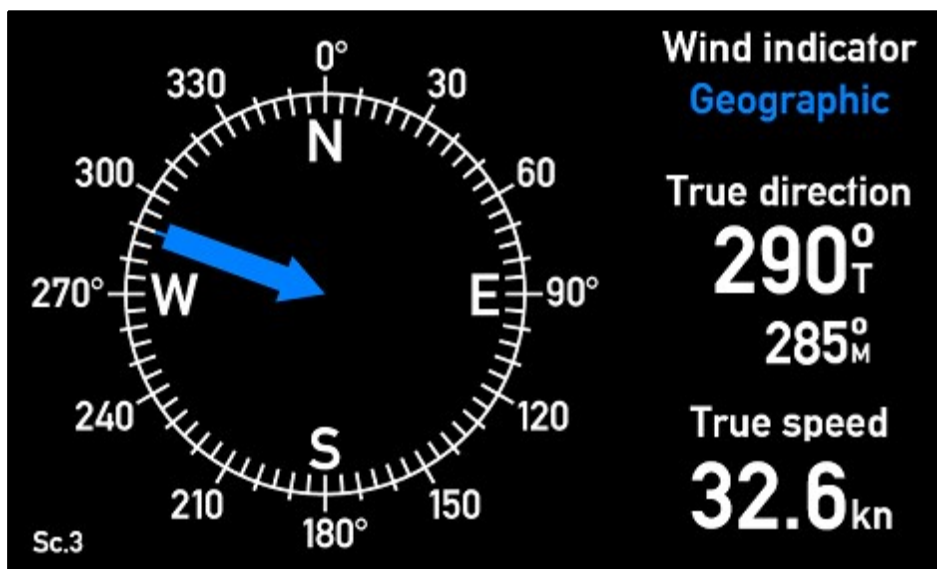

Screen 4

S4 Rel+True wind

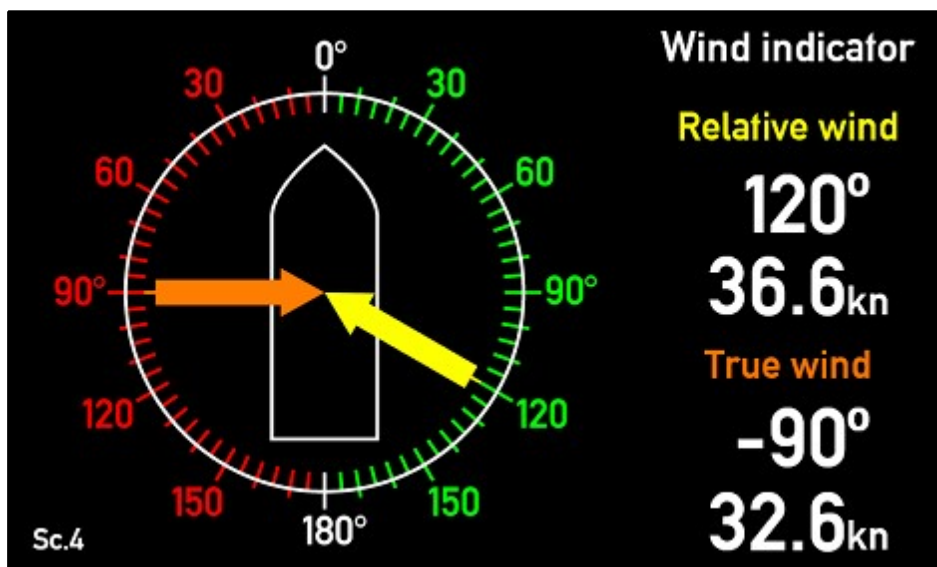**Description :** Wind indic. FWD, 4 screen

Relative, True and Geo. true wind.
Geo wind relative to Magn. and True N
Wind direction and wind speed (max 150 m/s)
One selectable headline for all screens
Selectable speed unit

Status : **VI Notes :**

This virtual indicator has 4 screens to toggle between using the left push-button on front.
Unit can be shifted using the quick menu using the right push-button,
select another unit profile or edit the profile to match your needs.

On screen 3 the wind direction is presented relative to both Magnetic north and True North
If you only want wind relative to true north please select VI007(Fwd) or VI008(Aft)

VI-setup profiles (VS) for VI005


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind and True wind rel. ship MWD1: Geographic true wind (T+M) Output are selected and activated from menu !		
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True and Geographic true wind at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind and True wind (repeated) MVD1: Geo. true wind (T+M)(repeated) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA0183 - Calculate NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed and heading at input S2.1 or S2.3 are used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind MWD1: Geographic wind dir. (T + M) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		

VI-setup profiles (VS) for VI005

VS No.	Name	Description	Status	Notes
4	VS04 NMEA FB	NMEA0183 - Calculate w Fallback As VS 03 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.


Screen 1

S1 Rel. wind

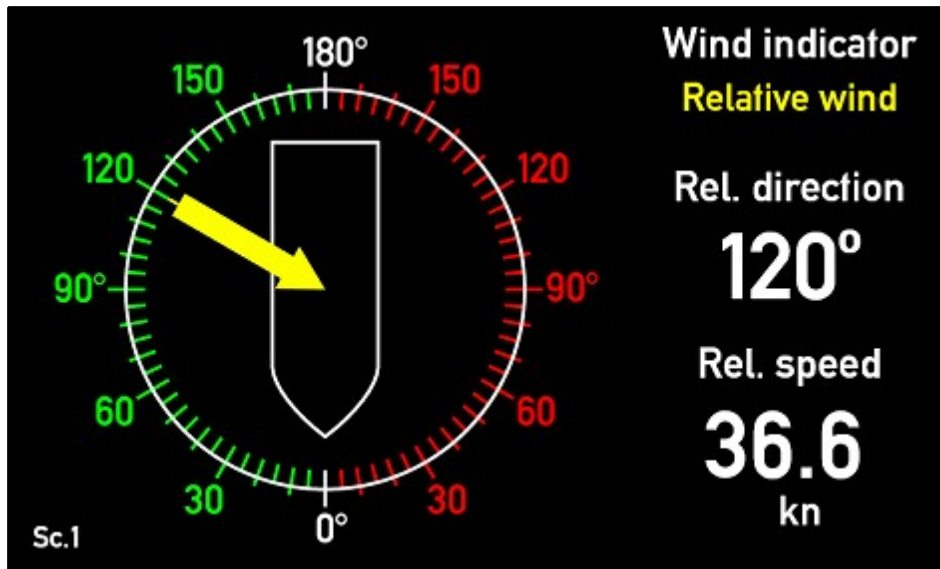


Screen 2

S2 True wind

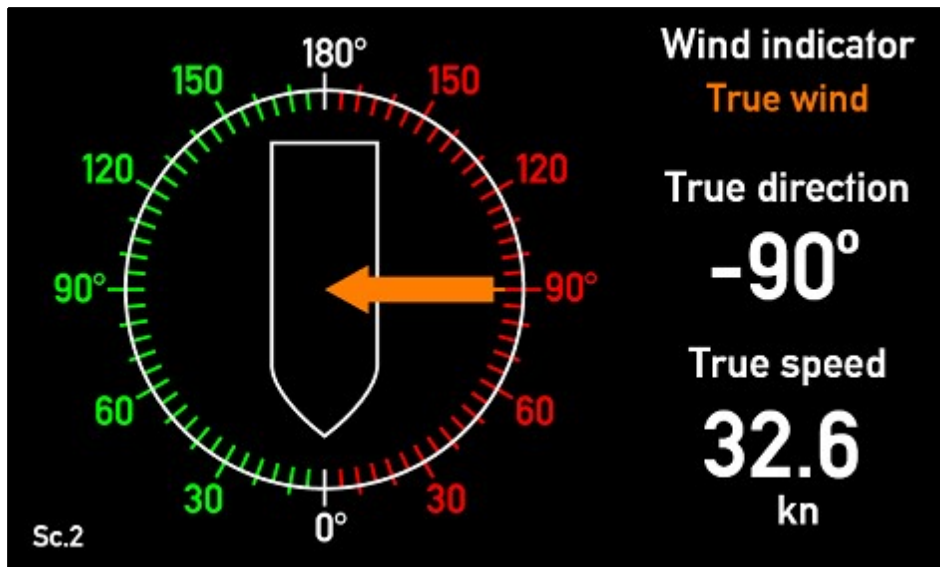


Screen 3

S3 Geo wind

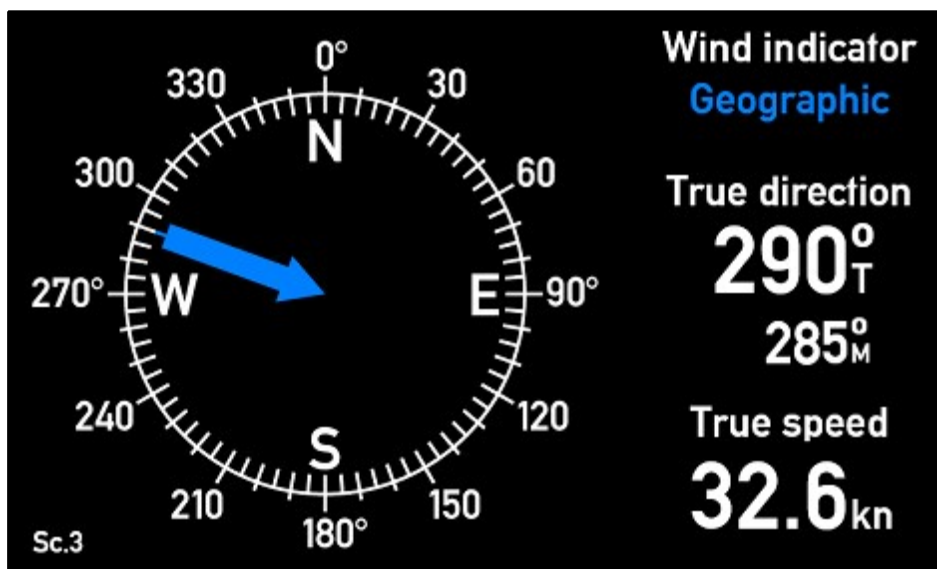

Screen 4

S4 Rel+True wind

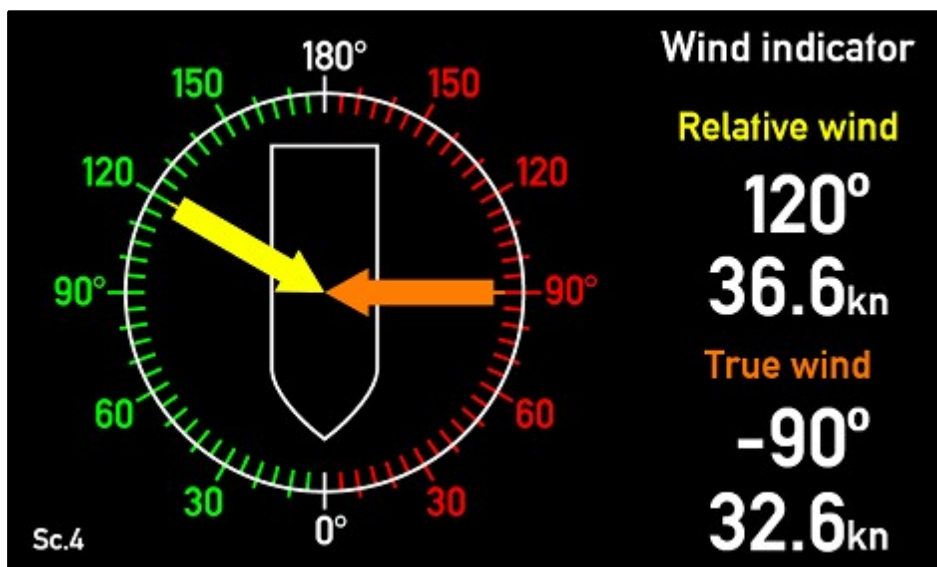**Description :** Wind indic. AFT, 4 screen

Relative, True and Geo. true wind
 Geo wind relative to Magn. and True N
 Wind direction and wind speed (max 150 m/s)
 One selectable headline for all screens
 Selectable speed unit

Status :**VI Notes :**

This virtual indicator has 4 screens to toggle between using the left push-button on front.
 Unit can be shifted using the quick menu using the right push-button,
 select another unit profile or edit the profile to match your needs.

On screen 3 the wind direction is presented relative to both Magnetic north and True North
 If you only want wind relative to true north please select VI007(Fwd) or VI008(Aft)

VI-setup profiles (VS) for VI006


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind and True wind rel. ship MWD1: Geographic true wind (T+M) Output are selected and activated from menu !		
2	VS02 NMEA 1	NMEA wind in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True and Geographic true wind at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind and True wind (repeated) MVD1: Geo. true wind (T+M) (repeated) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA - Calculate wind NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed and heading at input S2.1 or S2.3 are used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind MWD1: Geographic wind dir. (T+M) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		

VI-setup profiles (VS) for VI006

VS No.	Name	Description	Status	Notes
4	VS04 NMEA FB	NMEA0183 - Calculate w Fallback As VS 03 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.


Screen 1

S1 Rel. wind

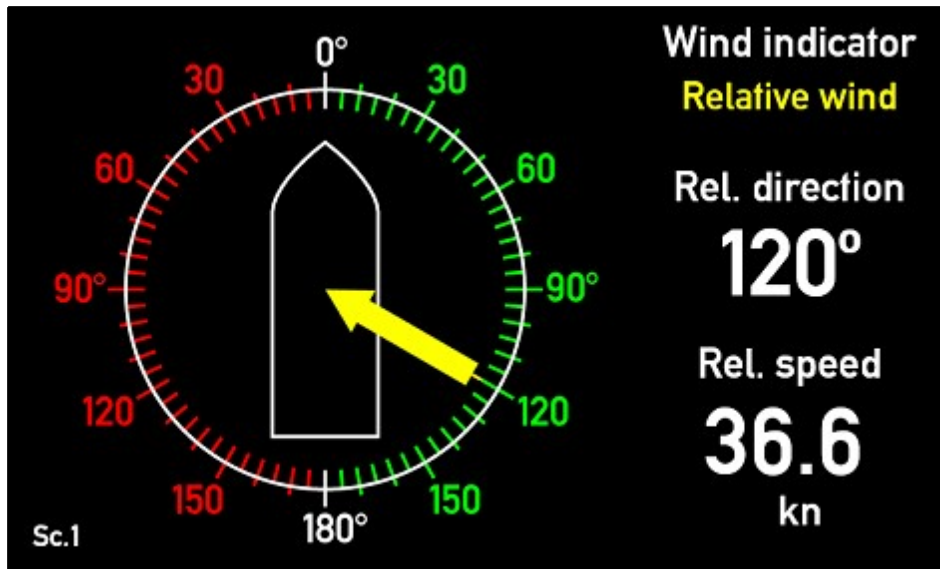


Screen 2

S2 True wind

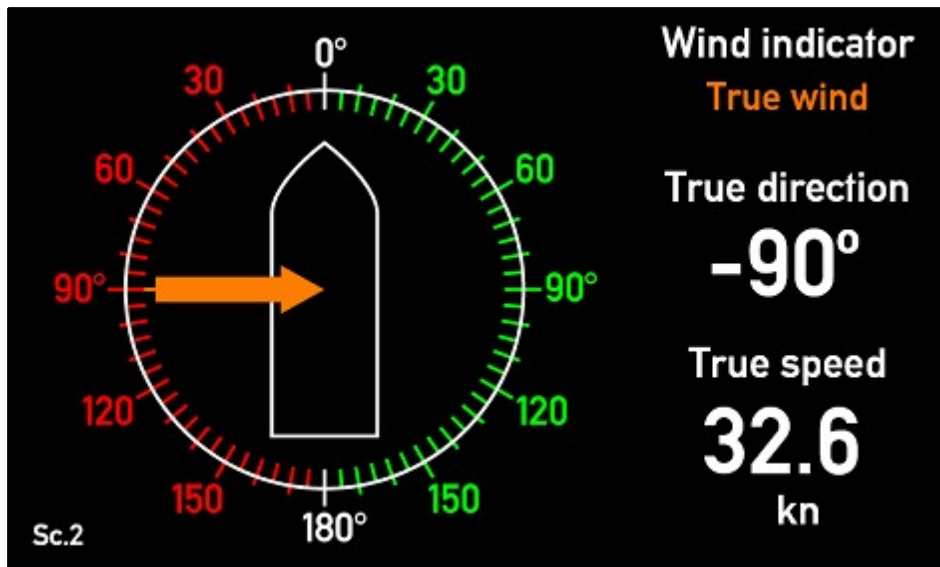


Screen 3

S3 Geo wind

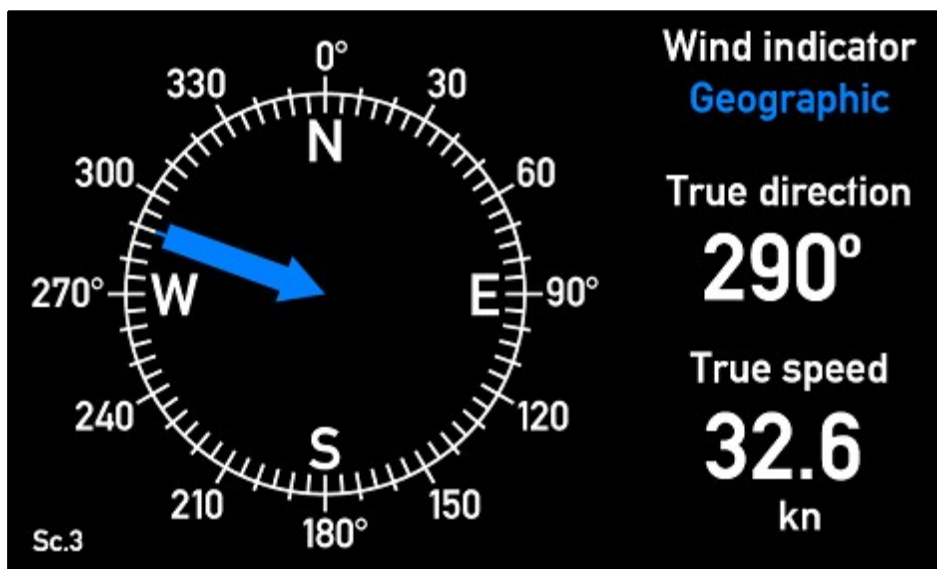

Screen 4

S4 Rel+True wind

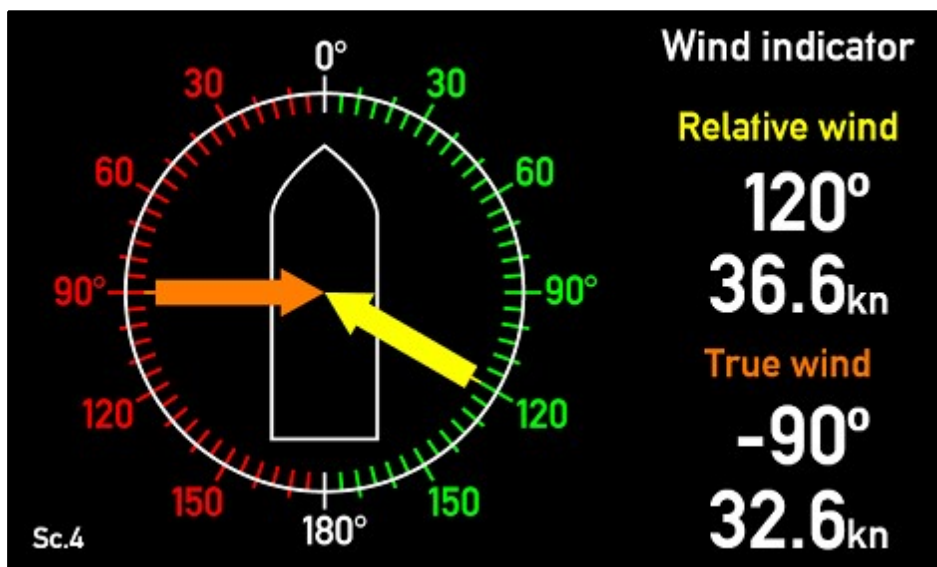**Description :** Wind indic. FWD, 4 screen

Relative, True and Geo. true wind.
Geo wind relative to True North
Wind direction and wind speed (max 150 m/s)
One selectable headline for all screens
Selectable speed unit

Status :

VI Notes : This virtual indicator has 4 screens to toggle between using the left push-button on front.
Unit can be shifted using the quick menu using the right push-button,
select another unit profile or edit the profile to match your needs.

On screen 3 the wind direction is presented relative to True North

VI-setup profiles (VS) for VI007


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind and True wind rel. ship MWD1: Geographic true wind Output are selected and activated from menu !		
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True and Geographic true wind at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind and True wind (repeated) MVD1: Geo. true wind (repeated) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA0183 - Calculate NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed and heading at input S2.1 or S2.3 are used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind MWD1: Geographic true wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		

VI-setup profiles (VS) for VI007

VS No.	Name	Description	Status	Notes
4	VS04 NMEA FB	NMEA0183 - Calculate w Fallback As VS 03 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.


Screen 1

S1 Rel. wind

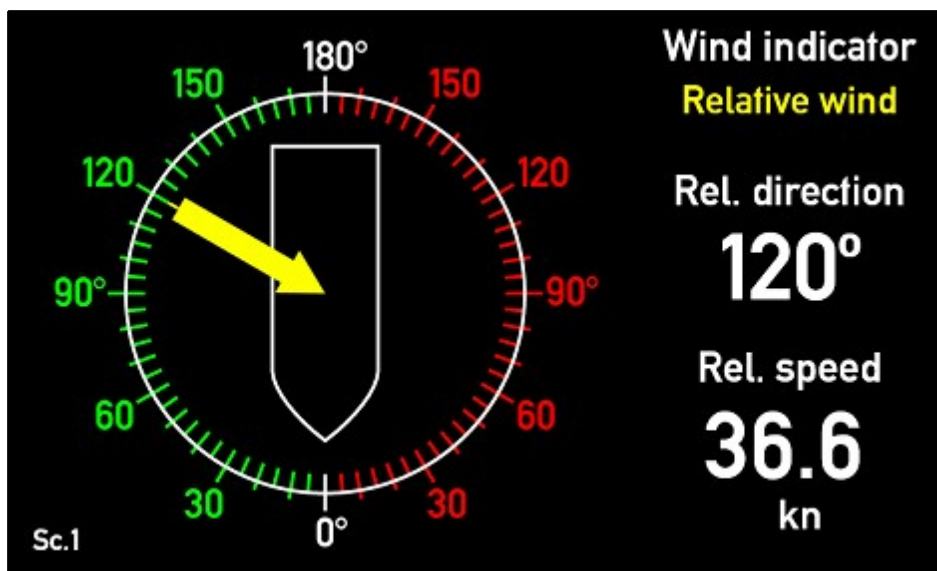


Screen 2

S2 True wind

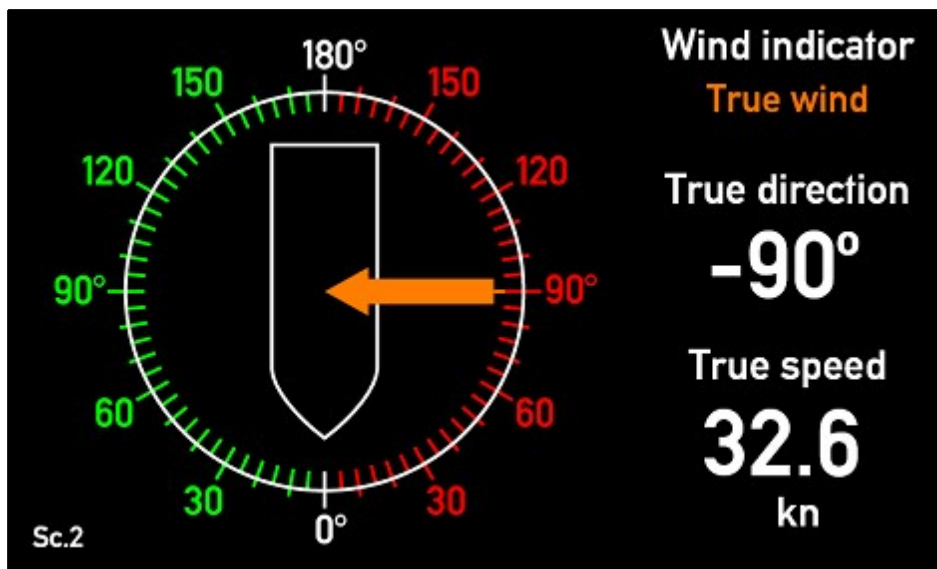


Screen 3

S3 Geo wind

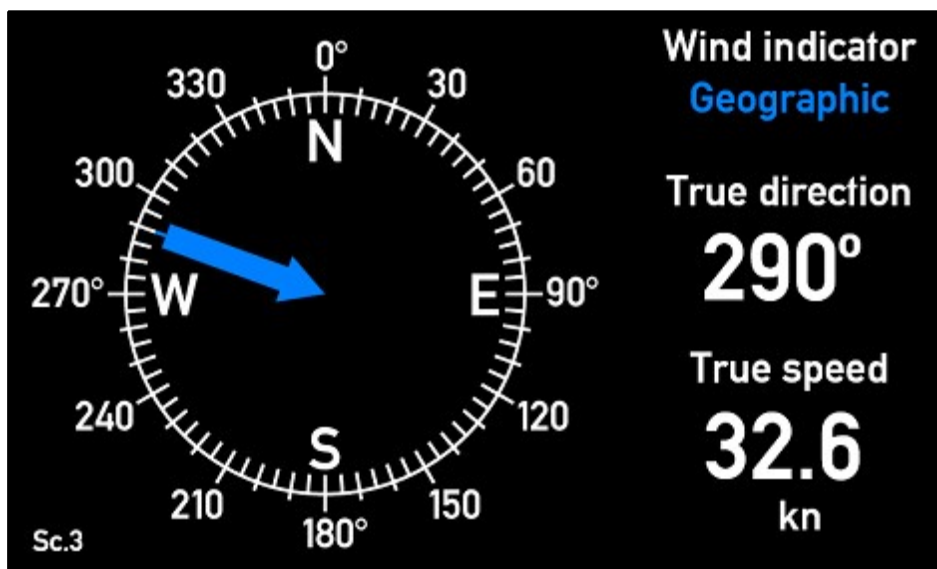

Screen 4

S4 Rel+True wind

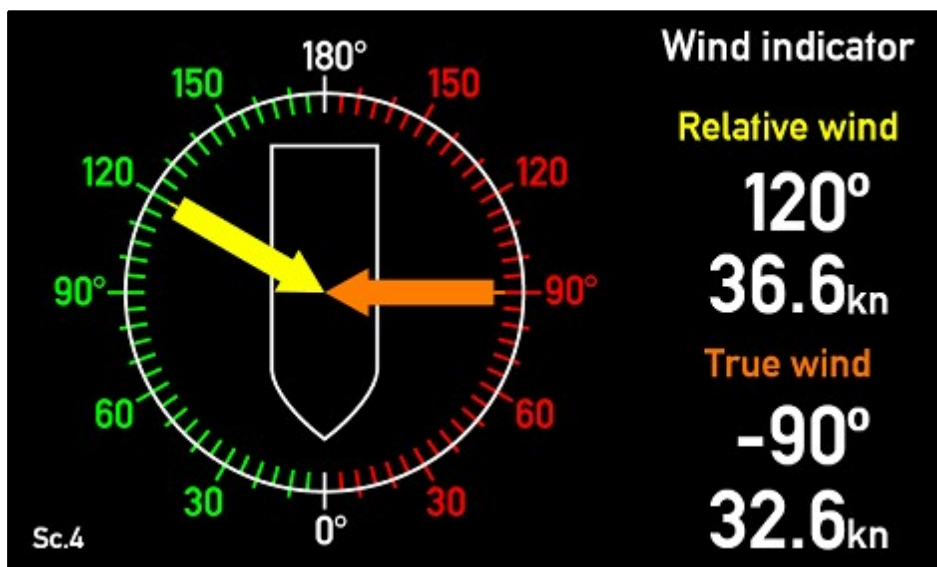**Description :** Wind indic. AFT, 4 screen

Relative, True and Geo. true wind
 Geo wind relative to True North
 Wind direction and wind speed (max 150 m/s)
 One selectable headline for all screens
 Selectable speed unit

Status :

VI Notes : This virtual indicator has 4 screens to toggle between using the left push-button on front.
 Unit can be shifted using the quick menu using the right push-button,
 select another unit profile or edit the profile to match your needs.


On screen 3 the wind direction is presented relative to True North
 If you only want wind relative to true north please select VI007(Fwd) or VI008(Aft)

VI-setup profiles (VS) for VI008

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind and True wind rel. ship MWD1: Geographic true wind Output are selected and activated from menu !		
2	VS02 NMEA 1	NMEA wind in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True and Geographic true wind at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind and True wind rel. ship (repeated) MVD1: Geo. true wind (repeated) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA - Calculate wind NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed and heading at input S2.1 or S2.3 are used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind rel. ship MWD1: Geographic true wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		

VI-setup profiles (VS) for VI008

VS No.	Name	Description	Status	Notes
4	VS04 NMEA FB	NMEA0183 - Calculate w Fallback As VS 03 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.

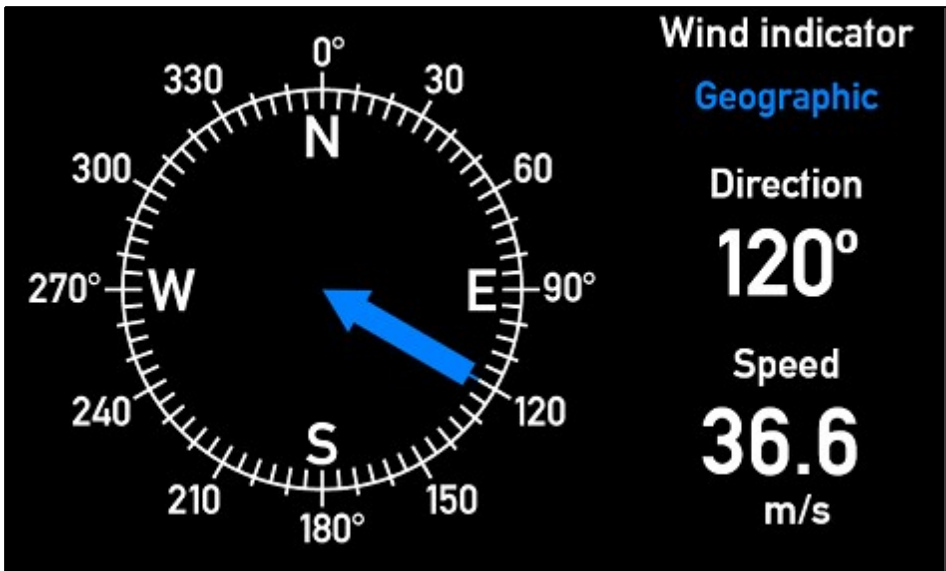VI 009	Wind Geo Land
Screen 1	S1 Geol. wind 
Description : Wind indicator geographical land Presents wind speed and direction to geographic north. Used for land based applications. Sensor must be aligned to north Wind direction and wind speed (max 150 m/s) One selectable headline and selectable speed unit Status :  VI Notes :	


VI-setup profiles (VS) for VI009				
VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind Output are selected and activated from menu !		

VI-setup profiles (VS) for VI009

VS No.	Name	Description	Status	Notes
2	VS02 NMEA 1	NMEA0183 in/out Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). Requires sentence MWV. Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA FB	NMEA0183 w Fallback As VS 02 plus fallback. Relative wind data can come from 2 sources. To use fallback, sources should: Be connected to separate inputs on NX2 OR Be connected to separate NX2 modules OR Have unique TalkerIDs. Fallback can be controlled from menu		Supports fallback on wind data. Two wind sensors / sources can be connected, either on separate inputs, or with unique Talker IDs. Primary (Wind speed 1) / Secondary (Wind speed 2) source is set with NMEA input setup. NMEA Auto setup in XDi will NOT configure primary and secondary sources. The NMEA Auto setup will detect both inputs, but only set one sensor as source for both primary and secondary data.

Screen 1

S1 Rel. wind

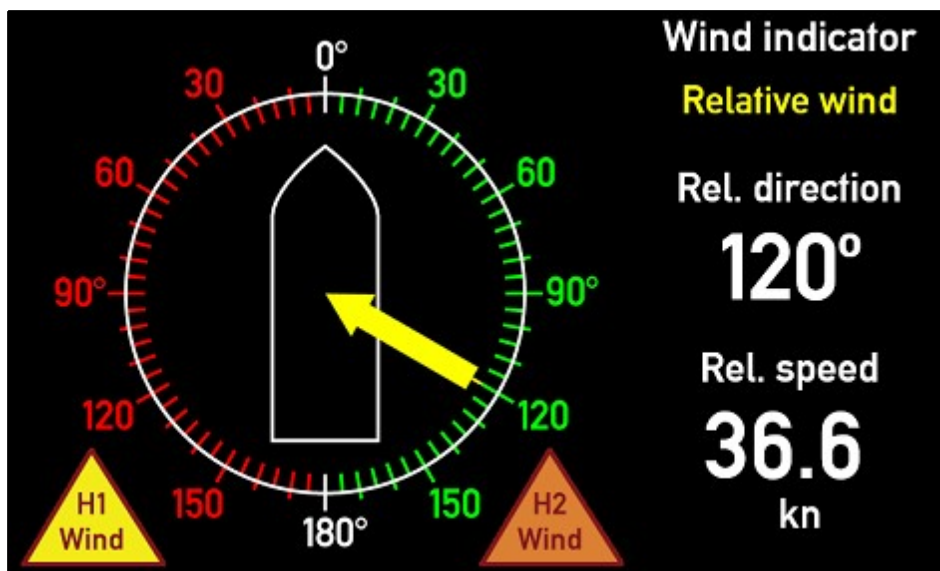

Description : Wind indicator FWD, Relative

Relative wind with alarm on rel. wind speed.

Requires DX1 in slot 2

Wind direction and wind speed (max 150 m/s)

Al. limits set in user menu/warning&sound/

Warning marks/Wind speed relative 1,

Crit.band 1 min for Alarm limit.

One selectable headline, selectable speed unit

Status :



VI Notes :

True wind speed alarm limits are configured in (units 0.1 kn):

User menu=>Warning and sound=>Warning Marks=>Wind speed relative 1:

Alarm 1: Band 1:Critical low value

Alarm 2: Band 2:Critical low value

VI-setup profiles (VS) for VI010


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater DX1 module required for alarm indication. Use this profile when input data are available on XDi-net. With NX1 module on slot 2: MWV1: Relative wind output can be activated from menu. Alarm levels for wind speed can be set in user menu - warning marks.		

VI-setup profiles (VS) for VI010

VS No.	Name	Description	Status	Notes
2	VS02 NMEA 1	NMEA0183 in/out NX2 slot 2 required. DX1 slot 1 required for alarm indication. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). Run NMEA auto input setup to configure With NX1 module on slot 2: MWV1: Relative wind output can be activated from menu. Alarm levels for wind speed can be set in user menu - warning marks.		


Screen 1


S1 Rel. wind

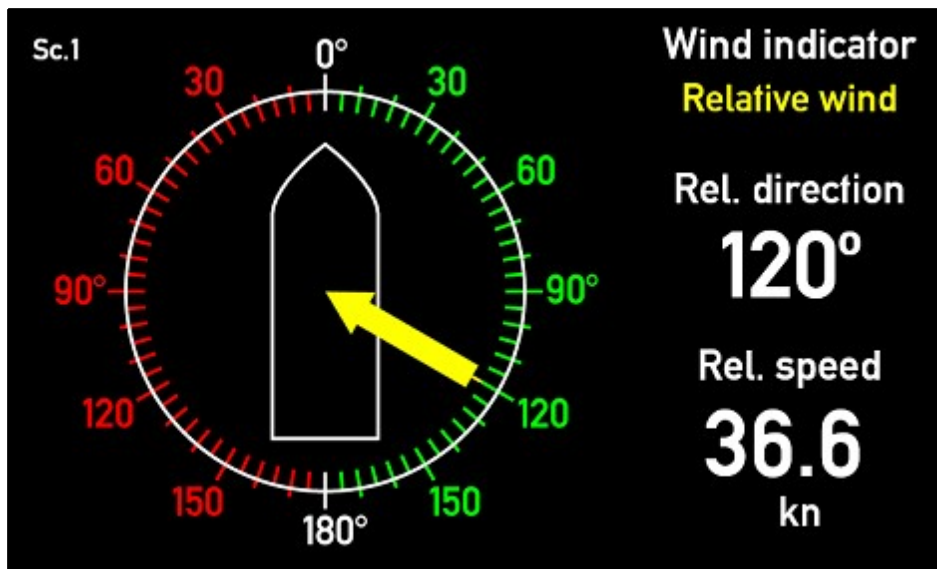

Screen 2

S2 True wind

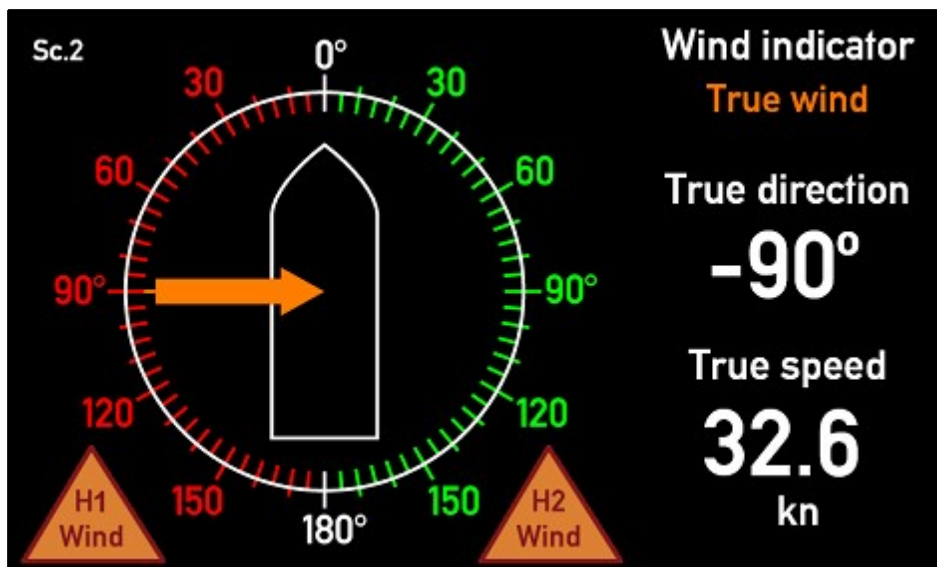

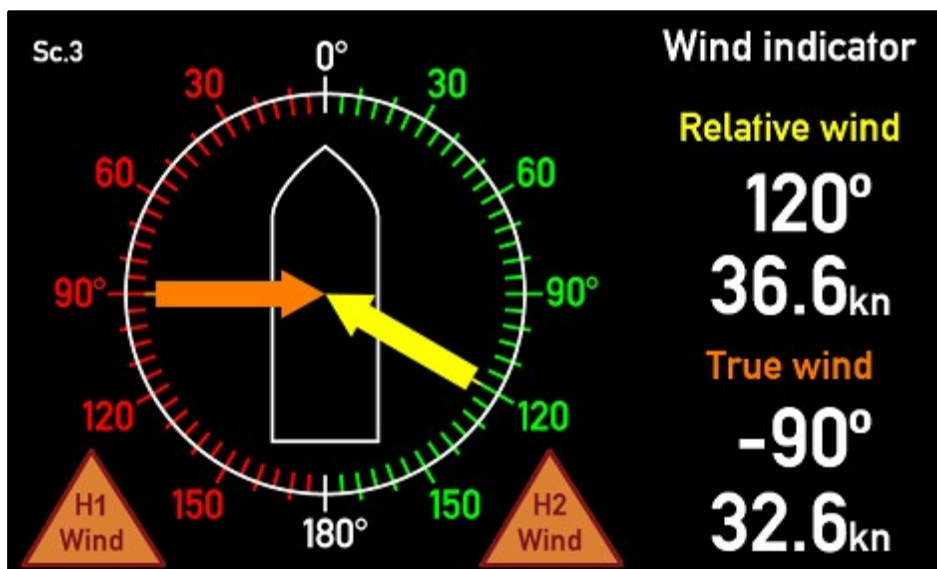

Description : Wind indic. FWD, Rel. & True

Requires DX1 in slot 2

Relative and True wind rel. to ship

with alarm on True wind speed

Wind direction and wind speed (max 150 m/s)

Al. limits set in user menu/warning&sound/

Warning marks/Wind speed true 1,

Crit.band 1&2 min for Alarm limit.

One selectable headline, selectable speed unit

Status :



VI Notes :

True wind speed alarm limits are configured in (units 0.1 kn):

User menu=>Warning and sound=>Warning Marks=>Wind speed true 1:

Alarm 1: Band 1:Critical low value

Alarm 2: Band 2:Critical low value

VI-setup profiles (VS) for VI011


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater DX1 slot 1 required for alarm indication. Use this profile when all input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: NMEA output: MWV1 activate from menu Alarm levels for wind speed can be set in user menu - warning marks.		

VI-setup profiles (VS) for VI011

VS No.	Name	Description	Status	Notes
2	VS02 NMEA 1	NMEA0183 in/out NX2 slot 2 required. DX1 slot 1 required for alarm indication. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). True wind relative to ship at input S2.1 or S2.3 Run NMEA auto input setup to configure NMEA output: MWV1 activate from menu. Alarm levels for wind speed can be set in user menu - warning marks.		
3	VS03 NMEA 2 Cal.	NMEA0183 - Calculate NX2 slot 2 required. DX1 slot 1 required for alarm indication. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed at input S2.1 or S2.3 is used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 activate from menu Alarm levels for wind speed can be set in user menu - warning marks.		

Screen 1

Relative wind

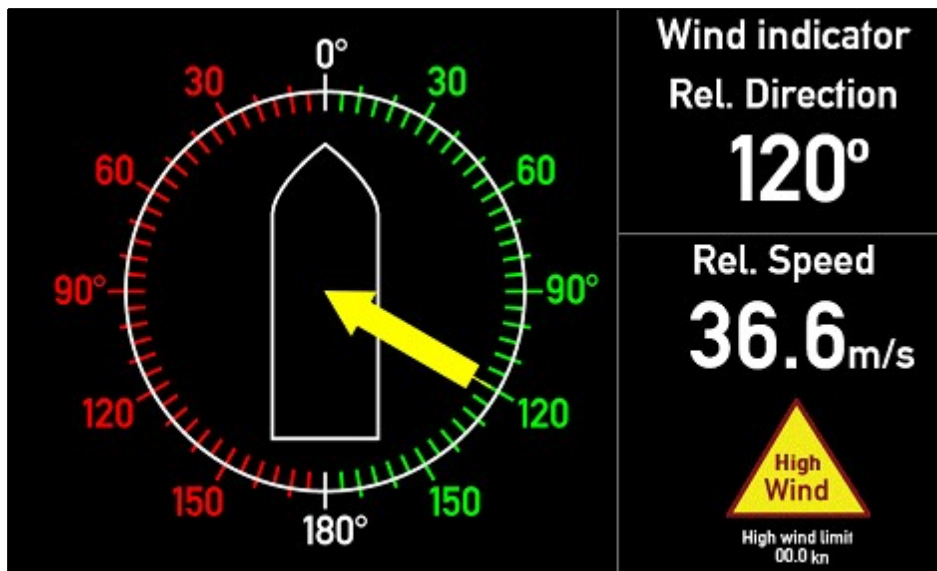**Description :** Relative wind indicator 1 alarm

Relative wind with alarm on rel. wind speed.

Requires DX1 in slot 2.

Wind direction and wind speed (max 150 m/s)

Al. limits set in user menu/warning&sound/

Warning marks/Wind speed relative 1,

Crit.band 1 min for Alarm limit,

Relay output for alarm.

One selectable headline , selectable speed unit

Status :**VI Notes :**

True wind speed alarm limits are configured in (units 0.1 kn):

User menu=>Warning and sound=>Warning Marks=>Wind speed relative 1:

Alarm 1: Band 1:Critical low value

VI-setup profiles (VS) for VI012


VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind Output are selected and activated from menu !		

VI-setup profiles (VS) for VI012

VS No.	Name	Description	Status	Notes
2	VS02 XDi-net/NMEA	NMEA Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). Requires sentence MWV. Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		


Screen 1

Relative wind

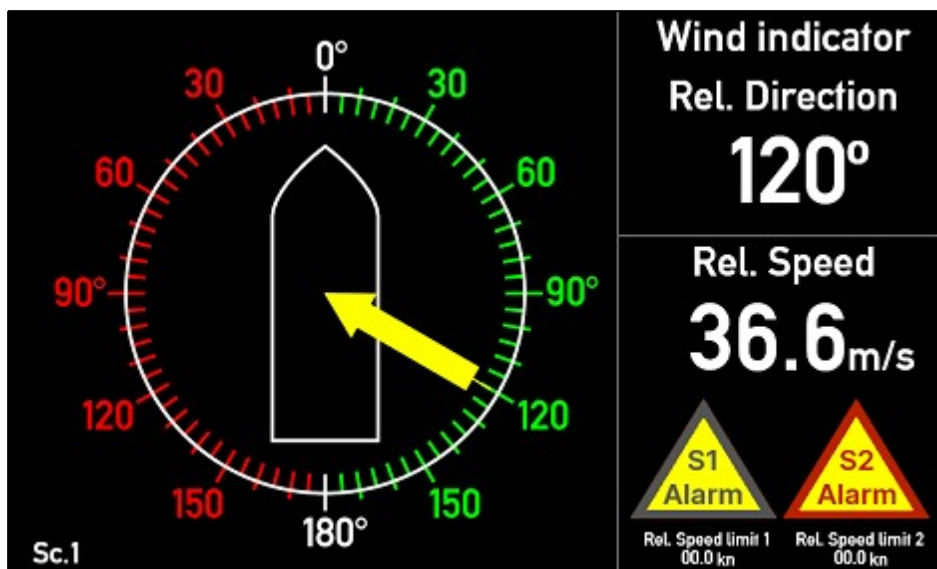


Screen 2

True wind

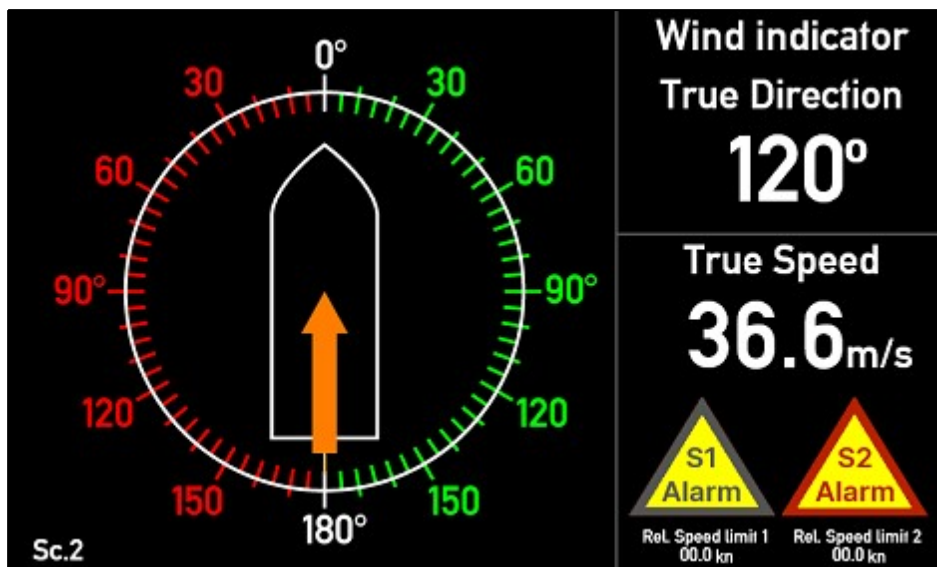


Screen 3

S3 Geo wind

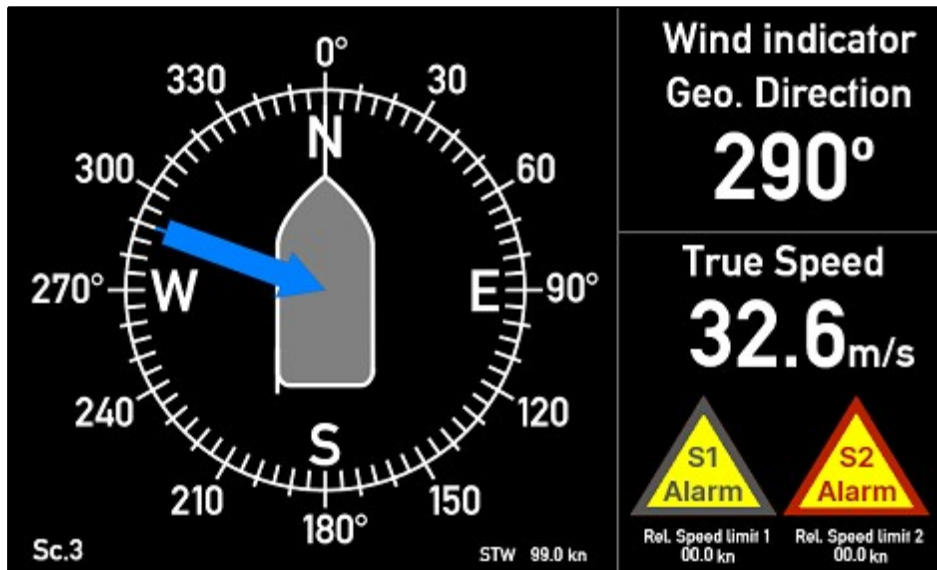

Screen 4

Relative_True wind

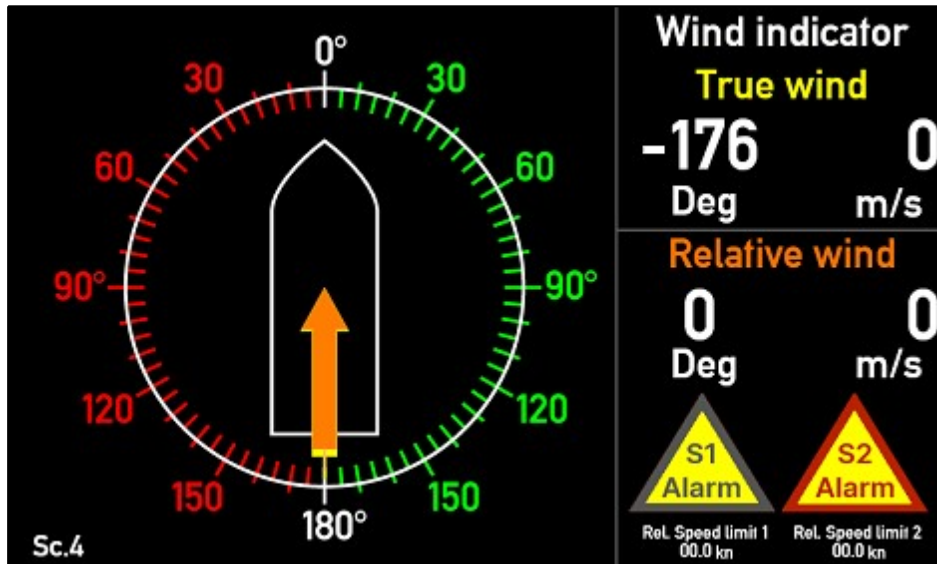**Description :** Wind indic. FWD, 2 Rel. wind alarms

Rel., True, Geo wind, rel. wind 2 x speed alarms. **Requires DX1 in slot 2.**

Wind direction and wind speed (max 150 m/s)

Al. limits set in user menu/warning&sound/

Warning marks/Wind speed relative 1

Crit.band 1 min for Al. 1, and 2 min for Al. 2

Relay output for each alarm.

One selectable headline , selectable speed unit

Status :**VI Notes :**

Relative wind speed alarm limits are configured in (units 0.1 kn):

User menu=>Warning and sound=>Warning Marks=>Wind speed true 1:

Alarm 1: Band 1:Critical low value

Alarm 2: Band 2:Critical low value

VI-setup profiles (VS) for VI013

VS No.	Name	Description	Status	Notes
1	VS01 XDi-net	XDi-net repeater Use this profile when input data are available on XDi-net. XDi-net data are typically supplied from another XDi, setup to receive NMEA data via NX2 module and/or calculated and share data. With NX1 module on Slot 1 or 2: Supported for XDi-net to NMEA output: MWV1: Relative wind Output are selected and activated from menu !		
2	VS02 NMEA	NMEA Requires NX2 extension module on Slot 2. Default NMEA connections: Relative wind sensor data at S2.2 RX/TX2 (RS485). Requires sentence MWV. Run NMEA auto input setup to configure NMEA output: MWV 1: Relative wind Must be activated from menu. Note: Wind direction is corrected for sensor offset.		
3	VS03 NMEA 2 Cal.	NMEA0183 - Calculate NX2 extension module is required on Slot 2. Default NMEA connection: Relative wind data at input S2.2 RX/TX2 (RS485). Speed and heading at input S2.1 or S2.3 are used to calculate true wind. Run NMEA auto input setup to configure NMEA output: MWV1 : Relative wind and True wind MWD1: Geographic wind dir. (T + M) Must be activated from menu. Note: Wind direction is corrected for sensor offset.		